



Straight Boot, No Lip

202A111 to 202A196 are heat-shrinkable straight boots used for mechanical protection and connector to cable strain relief. This family of boot has no lip, so that they can be installed directly onto the connector accessory thread. They are available with a pre-coated adhesive to provide an effective environmental seal between the connector and the cable.

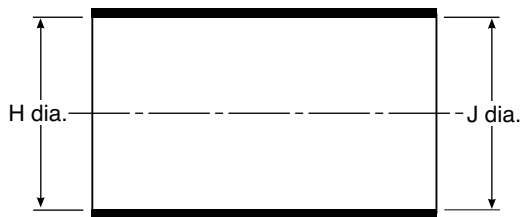

As supplied

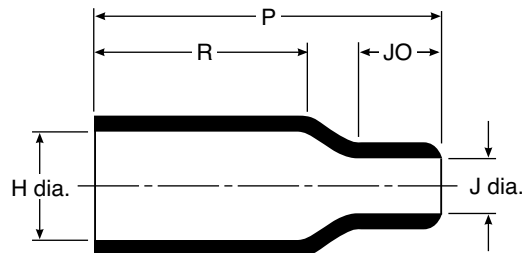

After unrestricted recovery

202A111 to 196 Straight boot, no lip

Materials available

- 3 Semi-rigid modified polyolefin
- 4 Flexible modified polyolefin
- 12 Modified fluoro-elastomer (Viton)
- 25 Fluid resistant modified elastomer
- 100 Low fire-hazard, zero-halogen polyolefin

Table of dimensions (mm)

Dimensions apply to all materials unless otherwise indicated

	Expanded as supplied (min)				Recovered after heating (max)				
	H	H	J	J	H	J	P	R	JO
	-12, -100		-12, -100						
202A111	16.5	16.5	16.5	11.9	7.9	3.8	25.4	14.2	5.8
202A121	24.6	22.6	24.6	17.8	9.9	5.3	38.1	21.8	9.1
202A132	28.4	26.2	28.4	20.3	14.2	6.6	51.3	27.9	13.0
202A142	31.0	31.0	31.0	25.4	17.8	7.4	66.8	35.6	17.8
202A153	36.1	36.1	36.1	26.2	21.9	8.6	73.7	41.4	16.0
202A163	42.7	42.7	42.7	27.2	27.4	9.4	99.1	62.7	18.0
202A174	51.8	48.3	51.8	48.3	35.3	16.0	130.3	64.8	41.9
202A185	66.0	66.0	66.0	54.1	43.7	19.6	161.3	90.2	47.8
202A196	86.4	86.4	86.4	71.4	57.2	26.9	212.6	113.0	62.2

Coatings

Material

- 25
- 100
- 3, -50
- 3, -4

Recommended coatings:

- /86 High temperature hot melt adhesive
- /225 Pre-coated curing adhesive
- /180 Low fire-hazard hot melt adhesive
- /86 High temperature hot melt adhesive
- /42 General purpose hot melt adhesive

Modifications

Potting Ports

Code

-00

cabletec