

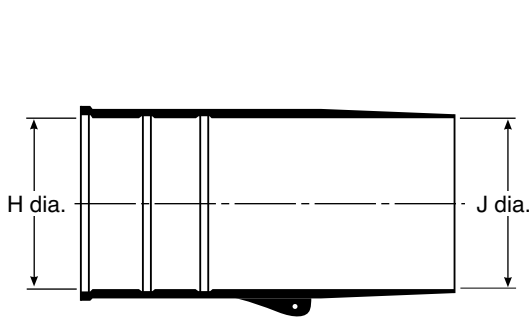


Straight, Lipped Boot

202K111 to 202K185 are heat-shrinkable straight lipped boots for use with connector adaptors to provide strain relief for harness systems using circular connectors. They are available with a pre-coated adhesive to provide an effective environmental seal between the connector and the cable.

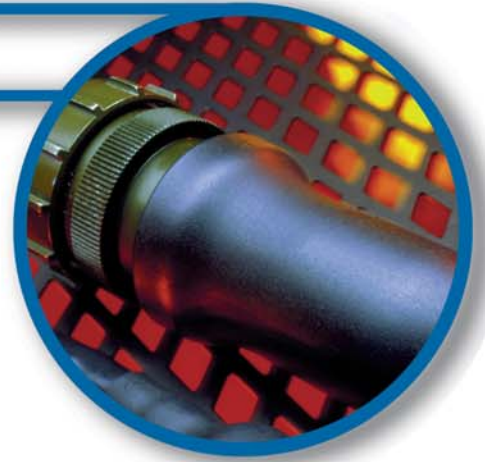

As supplied

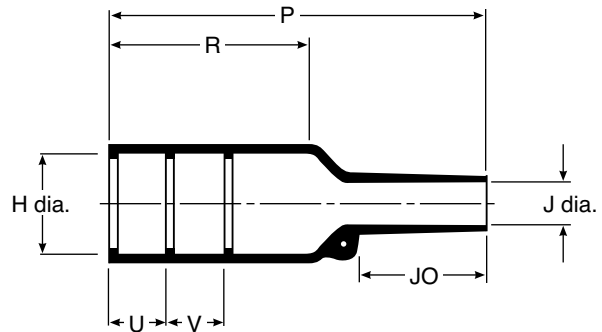

After unrestricted recovery

202K111 to 185 Straight, lipped boot

Materials available

- 3 Semi-rigid modified polyolefin
- 4 Flexible modified polyolefin
- 12 Modified fluoro-elastomer (Viton)
- 25 Fluid resistant modified elastomer
- 100 Low fire-hazard, zero-halogen polyolefin

Table of dimensions (mm)

Dimensions apply to all materials unless otherwise indicated

	Expanded as supplied (min)				Recovered after heating (max)					
	H	J	J -12	J -100	H	J	P	R	U&V	JO
202K111*	17.0	17.0	-	-	6.9	3.0	39.0	24.0	12.0	10.8
202K121*	24.0	24.0	13.0	14.0	10.4	5.6	38.0	21.0	12.0	8.5
202K132*	30.0	30.0	14.0	15.0	14.2	5.9	55.0	32.0	12.0	11.5
202K142*	31.0	31.0	16.0	18.0	18.0	7.1	67.0	35.0	20.0	17.0
202K153*	36.0	36.0	19.0	21.0	22.4	8.4	80.0	42.0	20.0	19.5
202K163	43.0	43.0	22.0	25.0	28.2	9.9	99.0	61.0	20.0	21.0
202K174	60.0	60.0	35.0	39.0	35.1	15.7	130.0	72.0	20.0	39.0
202K185	66.0	66.0	38.0	42.0	44.5	16.8	170.0	90.0	20.0	51.5

*Supplied with only 2 lips, dimension V does not apply

Coating	Material	Recommended coating:
-25		/86 High temperature hot melt adhesive /225 Pre-coated curing adhesive
-100		/180 Low fire-hazard hot melt adhesive
-3, -50		/86 High temperature hot melt adhesive
-3, -4		/42 General purpose hot melt adhesive
Modifications		Code
Length	1 lip removed	-01
	2 lips removed	-02 (163, 174, 185 only)
Potting Ports		-00
	1 lip removed plus potting ports	-11
	2 lips removed plus potting ports	-21 (163, 174, 185 only)

