


“Y” Shaped Transition



382A012 to 382A046 are “Y” shaped heat-shrinkable transition boots designed to provide strain relief, sealing and mechanical protection on cable harness systems. “Y” shaped transitions are available with a pre-coated adhesive to provide an effective environmental seal at the transition point.

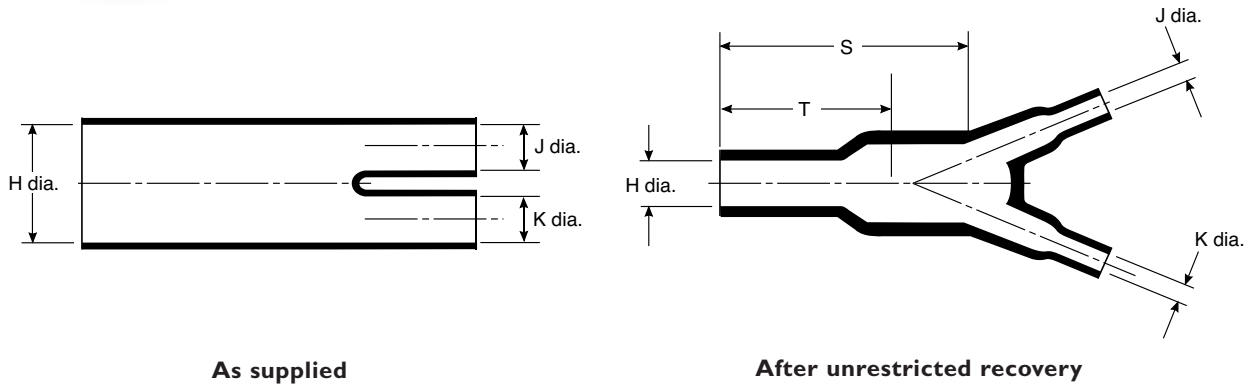

As supplied

After unrestricted recovery

382A012 to 046 “Y” Shaped Transition

Materials available

- 3 Semi-rigid modified polyolefin
- 4 Flexible modified polyolefin
- 12 Modified fluoro-elastomer (Viton)
- 25 Fluid resistant modified elastomer
- 100 Low fire-hazard, zero-halogen polyolefin

Table of dimensions (mm)

Dimensions apply to all materials unless otherwise indicated

	Expanded as supplied (min)			Recovered after heating (max)				
	H	J	K	H	J	K	S	T
382A012	13.2	6.6	6.6	6.1	3.3	3.3	23.9	15.5
382A023	26.9	13.2	13.2	12.4	6.1	6.1	53.3	33.0
382A034	38.6	26.9	26.9	18.0	12.4	12.4	78.7	55.9
382A046	55.6	26.9	26.9	25.9	12.7	12.7	111.8	71.1

Coatings	Material	Recommended coatings:
-25		/86 High temperature hot melt adhesive
		/225 Pre-coated curing adhesive
-100		/180 Low fire-hazard hot melt adhesive
-3, -50		/86 High temperature hot melt adhesive
-3, -4		/42 General purpose hot melt adhesive

