

DR-25



DR-25 is an outstanding rugged heat-shrink tubing that has excellent resistance to aviation and diesel fuels, hydraulic fluids and lubricating oils. This product is ideal for a variety of applications where a rugged, fluid-resistant tubing is necessary, such as military ground systems and auto-sport harness systems. DR-25 tubing is also available in a thin-wall form (DR-25-TW).



Technical Characteristics

Continuous operating temperature	-75°C to +150°C
Minimum full recovery temperature	+175°C
Shrink ratio	2:1

Part Numbering Information


Part No	D (mm)	d (mm)	W (mm)
DR-25 - 1/8 - 0	3.2	1.6	0.76
DR-25 - 3/16 - 0	4.8	2.4	0.84
DR-25 - 1/4 - 0	6.4	3.2	0.89
DR-25 - 3/8 - 0	9.5	4.8	1.02
DR-25 - 1/2 - 0	12.7	6.4	1.22
DR-25 - 3/4 - 0	19.0	9.5	1.45
DR-25 - 1 - 0	25.4	12.7	1.78
DR-25 - 1-1/2 - 0	38.0	19.0	2.41
DR-25 - 2 - 0	51.0	25.4	2.79
DR-25 - 3 - 0	76.0	38.0	3.18

Availability

Standard colours: Black (0)

Specifications: Def Stan 59-97 Type 6B
AMS-DTL-23053/16 (except 1/8 and 3/16)
VG95343 Part 5 Type D
BS 4G-198 Part 3 10A
NATO Codified

Note: Thin-wall tubing also available - DR-25-TW

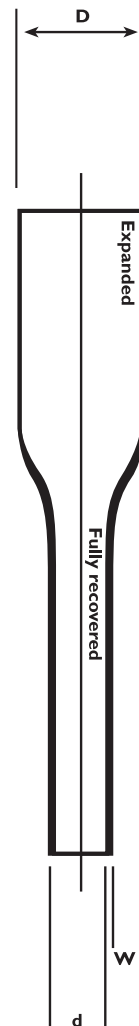

cabletec