


# ZHTM



ZHTM is a medium-wall, low toxicity heat-shrink tubing used where fire safety characteristics such as low smoke emission and low evolution of acid gasses are important. ZHTM is used for insulation and protection of systems in enclosed spaces such as in marine, mass-transit and offshore installations. ZHTM is zero-halogen and exhibits good mechanical and physical properties.

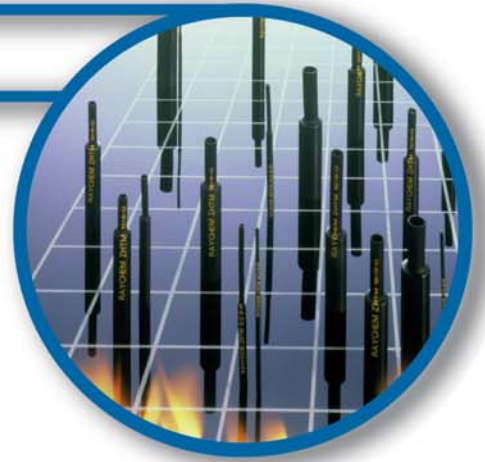

## Technical Characteristics

Continuous operating temperature	-30°C to +105°C
Minimum full recovery temperature	+121°C
Shrink ratio	2:1


## Part Numbering Information

Part No	D (mm)	d (mm)	W (mm)
ZHTM - 3/1.5 - 0	3.0	1.5	0.70
ZHTM - 5/2.5 - 0	5.0	2.5	0.75
ZHTM - 8/4 - 0	8.0	4.0	0.80
ZHTM - 12/6 - 0	12.0	6.0	0.90
ZHTM - 18/9 - 0	18.0	9.0	1.00
ZHTM - 24/12 - 0	24.0	12.0	1.10
ZHTM - 40/20 - 0	40.0	20.0	1.30
ZHTM - 50/30 - 0	50.0	30.0	1.50

## Availability

Standard colours: Black (0)

Specifications: Def Stan 59-97 Type 8  
BR1326  
BS 4G-198 Part 3 Type 15  
VG95343 Part 5 Type L  
VDE 0341/Pt 9005

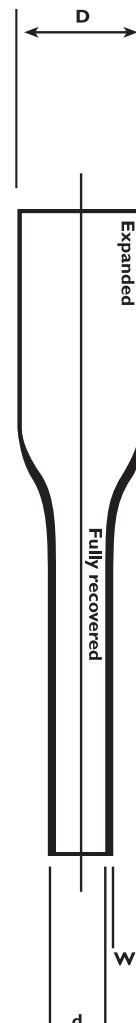

**cabletec**