


Roundit 2000 FR



Roundit 2000 FR is a wrap-around braided sleeving manufactured from flame-retarded polyester monofilaments and textured flame-retarded polyester multifilaments. The self-wrapping feature of Roundit 2000 FR allows for quick and easy installation and removal of the product for assembly and maintenance. Roundit 2000 FR is zero-halogen and provides excellent cut-through and abrasion resistance.

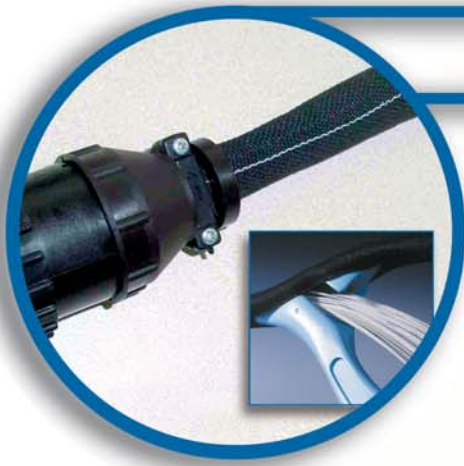

Technical Characteristics

Continuous operating temperature	-70°C to +125°C
Expansion ratio	Wrap-around

Part Numbering Information

Part No	Nominal Size* mm	Weight (g/m)
Roundit 2000FR 5 - 0/9	5	9
Roundit 2000FR 8 - 0/9	8	11
Roundit 2000FR 13 - 0/9	13	21
Roundit 2000FR 19 - 0/9	19	25
Roundit 2000FR 25 - 0/9	25	33
Roundit 2000FR 38 - 0/9	38	49


Availability

Standard colours: Black with a white tracer (0/9)

Specifications: NF16101 - 16102 : 13F2
DIN 5510/54837: S4, SR2, ST2

A professional assembly "Roundit-Tool" is available on request for sizes 5, 8 and 13mm

Note: *Nominal size is determined by wrapping the product around a mandrel of a given size to obtain 90 degrees of overlap (average value).

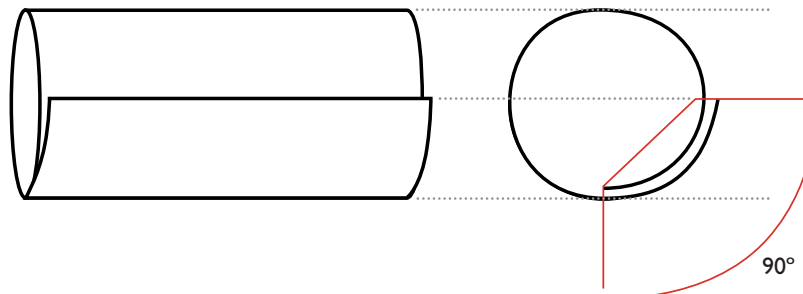

cabletec