


# Right Angled Boot, No Lip




222A111 to 222A196 are right angled heat-shrinkable boots used to provide mechanical protection and connector to cable strain relief. This family of boots has no lip, so that they can be installed directly onto the connector threads. They are available with a pre-coated adhesive to provide an effective environmental seal between the connector and the cable.

**Raychem**

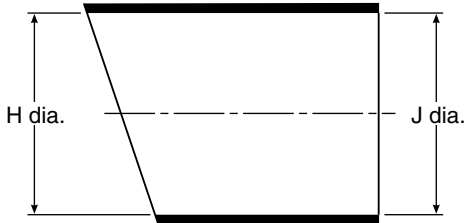

As supplied

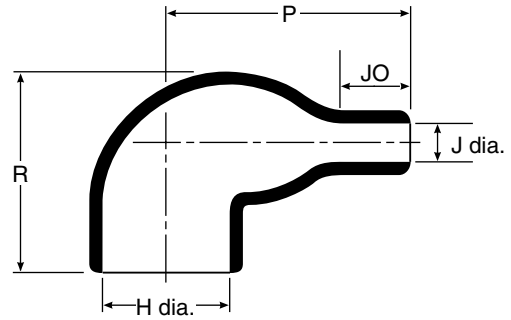

After unrestricted recovery

## 222A111 to 196 Right angled boot, no lip

### Materials available

- 3 Semi-rigid modified polyolefin
- 4 Flexible modified polyolefin
- 12 Modified fluoro-elastomer (Viton)
- 25 Fluid resistant modified elastomer
- 100 Low fire-hazard, zero-halogen polyolefin

### Table of dimensions (mm)

Dimensions apply to all materials unless otherwise indicated

	Expanded as supplied (min)				Recovered after heating (max)				
	H	J	J	J	H	J	P	R	JO
			-12	-100					
222A111	17.8	17.8	9.9	10.9	7.9	3.8	17.3	20.1	4.3
222A121	24.9	24.9	18.0	16.0	10.2	5.3	21.3	22.6	5.8
222A132	30.0	30.0	20.6	21.1	14.2	6.4	26.9	26.7	7.1
222A142	32.5	32.5	22.9	22.9	17.3	6.9	36.6	30.5	10.2
222A152	36.1	36.1	26.4	27.4	21.8	8.4	43.7	35.1	12.7
222A163	43.9	43.9	27.4	28.4	27.4	9.4	53.6	43.9	17.3
222A174	53.1	53.1	46.7	48.3	33.8	15.0	75.7	52.8	32.0
222A185	67.6	67.6	54.4	58.4	44.2	20.3	97.5	66.0	40.6
222A196	87.6	87.6	63.0	68.8	55.4	23.4	128.0	79.2	56.4

Coatings	Material	Recommended coatings:
	-25	/86 High temperature hot melt adhesive /225 Pre-coated curing adhesive
	-100	/180 Low fire-hazard hot melt adhesive
	-3, -50	/86 High temperature hot melt adhesive
	-3, -4	/42 General purpose hot melt adhesive
Modifications		Code
	Potting Ports	-00

**cabletec**