

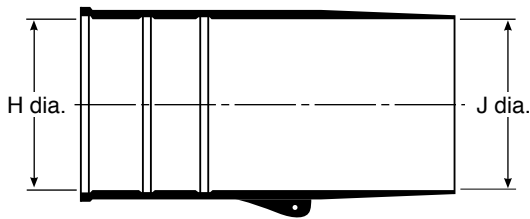


Straight, Lipped Boot

202K111 to 202K185 are heat-shrinkable straight lipped boots for use with connector adaptors to provide strain relief for harness systems using circular connectors. They are available with a pre-coated adhesive to provide an effective environmental seal between the connector and the cable.

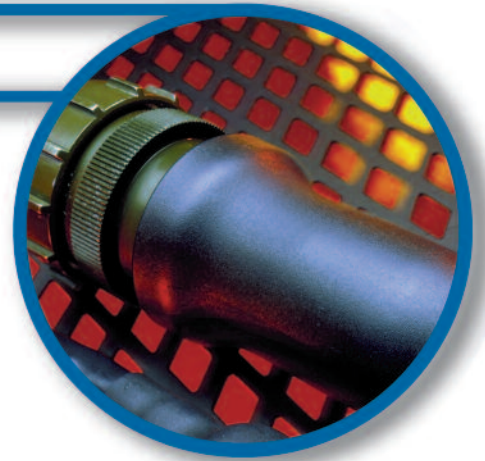

As supplied

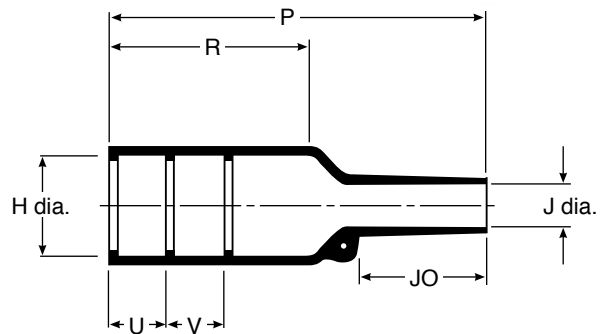

After unrestricted recovery

202K111 to 185 Straight, lipped boot

Materials available

- 3 Semi-rigid modified polyolefin
- 4 Flexible modified polyolefin
- 12 Modified fluoro-elastomer (Viton)
- 25 Fluid resistant modified elastomer
- 100 Low fire-hazard, zero-halogen polyolefin

Table of dimensions (mm)

Dimensions apply to all materials unless otherwise indicated

| | Expanded as supplied (min) | | | | Recovered after heating (max) | | | | | |
|----------|----------------------------|------|----------|-----------|-------------------------------|------|-------|------|------|------|
| | H | J | J -12 | J -100 | H | J | P | R | U&V | JO |
| 202K111* | 17.0 | 17.0 | - | - | 6.9 | 3.0 | 39.0 | 24.0 | 12.0 | 10.8 |
| 202K121* | 24.0 | 24.0 | 13.0 | 14.0 | 10.4 | 5.6 | 38.0 | 21.0 | 12.0 | 8.5 |
| 202K132* | 30.0 | 30.0 | 14.0 | 15.0 | 14.2 | 5.9 | 55.0 | 32.0 | 12.0 | 11.5 |
| 202K142* | 31.0 | 31.0 | 16.0 | 18.0 | 18.0 | 7.1 | 67.0 | 35.0 | 20.0 | 17.0 |
| 202K153* | 36.0 | 36.0 | 19.0 | 21.0 | 22.4 | 8.4 | 80.0 | 42.0 | 20.0 | 19.5 |
| 202K163 | 43.0 | 43.0 | 22.0 | 25.0 | 28.2 | 9.9 | 99.0 | 61.0 | 20.0 | 21.0 |
| 202K174 | 60.0 | 60.0 | 35.0 | 39.0 | 35.1 | 15.7 | 130.0 | 72.0 | 20.0 | 39.0 |
| 202K185 | 66.0 | 66.0 | 38.0 | 42.0 | 44.5 | 16.8 | 170.0 | 90.0 | 20.0 | 51.5 |

*Supplied with only 2 lips, dimension V does not apply

| Coating | Material | Recommended coating: |
|---------------|-----------------------------------|---|
| -25 | | /86 High temperature hot melt adhesive /225 Pre-coated curing adhesive |
| -100 | | /180 Low fire-hazard hot melt adhesive |
| -3, -50 | | /86 High temperature hot melt adhesive |
| -3, -4 | | /42 General purpose hot melt adhesive |
| Modifications | | Code |
| Length | 1 lip removed | -01 |
| | 2 lips removed | -02 (163, 174, 185 only) |
| Potting Ports | | -00 |
| | 1 lip removed plus potting ports | -11 |
| | 2 lips removed plus potting ports | -21 (163, 174, 185 only) |

