


# “Y” Shaped Transition



382A012 to 382A046 are “Y” shaped heat-shrinkable transition boots designed to provide strain relief, sealing and mechanical protection on cable harness systems. “Y” shaped transitions are available with a pre-coated adhesive to provide an effective environmental seal at the transition point.

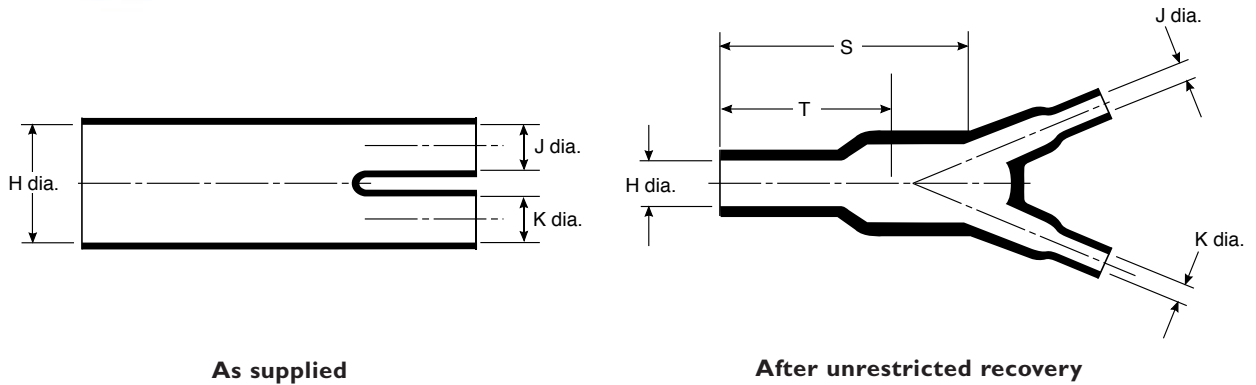

As supplied

After unrestricted recovery

## 382A012 to 046 “Y” Shaped Transition

### Materials available

- 3 Semi-rigid modified polyolefin
- 4 Flexible modified polyolefin
- 12 Modified fluoro-elastomer (Viton)
- 25 Fluid resistant modified elastomer
- 100 Low fire-hazard, zero-halogen polyolefin

### Table of dimensions (mm)

Dimensions apply to all materials unless otherwise indicated

	Expanded as supplied (min)			Recovered after heating (max)				
	H	J	K	H	J	K	S	T
<b>382A012</b>	13.2	6.6	6.6	6.1	3.3	3.3	23.9	15.5
<b>382A023</b>	26.9	13.2	13.2	12.4	6.1	6.1	53.3	33.0
<b>382A034</b>	38.6	26.9	26.9	18.0	12.4	12.4	78.7	55.9
<b>382A046</b>	55.6	26.9	26.9	25.9	12.7	12.7	111.8	71.1

Coatings	Material	Recommended coatings:
-25		/86 High temperature hot melt adhesive
		/225 Pre-coated curing adhesive
-100		/180 Low fire-hazard hot melt adhesive
-3, -50		/86 High temperature hot melt adhesive
-3, -4		/42 General purpose hot melt adhesive

