


HT-SCE Markers



HT-SCE heat-shrink markers are specifically designed for high temperature applications or where extreme resistance to fuels, lubricants or cleaning solvents is required. HT-SCE markers have very low vacuum out-gassing properties and as such are ideal for use on-board satellites. They are extremely tough and abrasion resistant and are very highly flame retarded. HT-SCE markers are fully compatible with the System Six range of printers and WinTotal software.

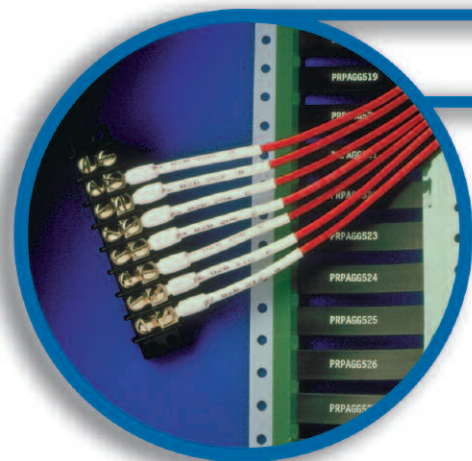

Technical Characteristics

| | |
|----------------------------------|---------------------------------|
| Continuous operating temperature | -55°C to +225°C |
| Shrink ratio | 2:1 (3:1 on 3/32 size) |
| Printing options | Dot matrix and thermal transfer |

Part Numbering Information

| Part No | Supplied Inside Diameter (mm) | Recovered Inside Diameter (mm) | Sleeve Length (mm) |
|-------------------------|-------------------------------|--------------------------------|--------------------|
| HT-SCE - 3/32 - Colour | 2.4 | 0.79 | 50 |
| HT-SCE - 1/8 - Colour | 3.2 | 1.6 | 50 |
| HT-SCE - 3/16 - Colour | 4.8 | 2.4 | 50 |
| HT-SCE - 1/4 - Colour | 6.4 | 3.2 | 50 |
| HT-SCE - 3/8 - Colour | 9.5 | 4.8 | 50 |
| HT-SCE - 1/2 - Colour | 12.7 | 6.4 | 50 |
| HT-SCE - 3/4 - Colour | 19.1 | 9.5 | 50 |
| HT-SCE - 1 - Colour | 25.4 | 12.7 | 50 |
| HT-SCE - 1-1/2 - Colour | 38.1 | 19.1 | 50 |

Availability

Standard colours: White (9) and Black (0)
Pack sizes: 250 and 1000 (1K)

Specifications: MIL-M-81531 & MIL-STD-202F method 215J (Print permanence)
UL VW-1

Note: For marked product add (M) to part number i.e. HT-SCE-3/32-9(M)
For pre-scored product add S1, S2 or S3 to part number i.e. HT-SCE-3/32-S1-9 for 1 score

FULL PRINTING AND KITTING SERVICE AVAILABLE

