


TMS-SCE Markers



TMS-SCE heat-shrink markers are designed to meet the wire identification needs of military, aerospace and demanding industrial applications. They are UL and CSA approved and are fully compatible with the System Six range of printers and WinTotal software. Immediately after printing they are smudge resistant and permanent to MIL-M-81531. TMS-SCE markers have a wide range of colours and sizes available and with their 3:1 shrink-ratio they cover a wide range of diameters. TMS-SCE markers are a proven and economical solution to a wide range of wire identification requirements in demanding environments.

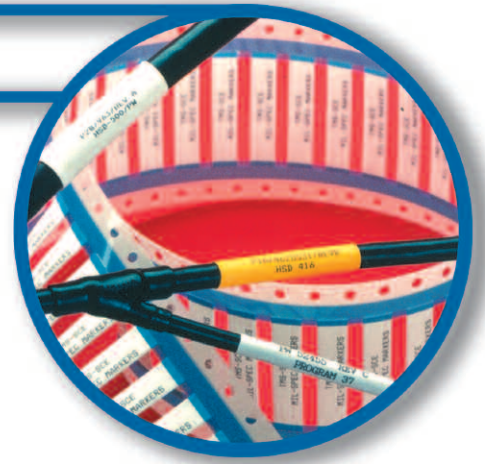

Technical Characteristics

Continuous operating temperature	-55°C to +135°C
Shrink ratio	3:1 (excluding 1-1/2" and 2" = 2:1)
Printing options	Dot matrix & thermal transfer

Part Numbering Information

Part No	Supplied Inside Diameter (mm)	Recovered Inside Diameter (mm)	Sleeve Length (mm)
TMS-SCE - 3/32 - Colour	2.4	0.79	50
TMS-SCE - 1/8 - Colour	3.2	1.1	50
TMS-SCE - 3/16 - Colour	4.8	1.6	50
TMS-SCE - 1/4 - Colour	6.4	2.1	50
TMS-SCE - 3/8 - Colour	9.5	3.2	50
TMS-SCE - 1/2 - Colour	12.7	4.2	50
TMS-SCE - 3/4 - Colour	19.1	6.4	50
TMS-SCE - 1 - Colour	25.4	8.5	50
TMS-SCE - 1-1/2 - Colour	38.1	19.1	50
TMS-SCE - 2 - Colour	50.8	25.4	50
TMS-SCE - 2-1/4 - Colour	57.2	19.1	50

Availability

Standard colours: Yellow (4) and White (9)
Non standard colours: Brown (1), Red (2), Pink (2L), Orange (3), Green (5), Blue (6), Violet (7), Grey (8), Black (0)
Pack sizes: 250, 1000 (1K) and 5000 (5K)

Specifications: UL E35586
CSA 31929
MIL-M-81531, MIL-I-STD-202F Method 215J (Print permanence)
Tubing: MIL-DTL-23053/5 classes 1 & 3
NATO Codified

Note: For marked product add (M) to part number i.e. TMS-SCE-1/8-4(M)
For pre-scored product add S1, S2 or S3 to part number i.e. TMS-SCE-1/8-S1-4 for 1 score

FULL PRINTING AND KITTING SERVICE AVAILABLE

